


Eurofit Flex With Ballast

Product Parts

- 1.Top pole(x1)
- 2.Side pole(x2)
- 3.Bottom pole with Bolts(x1)
- 4.Center Support Bar(x1)(for 90" only)
- 5.Ballast Base(x1)
- 6.Thumb Screw and washer(x2)
- 7.Graphic

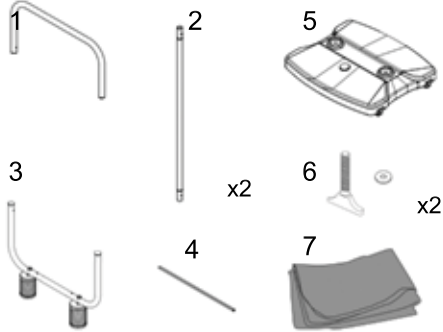

Display Set-up

Step 1

Remove all parts from the box and place on a clean, flat surface. Ensure you have all the components listed above.

Step 2


Assemble all the poles by connecting the corresponding numbers together while pressing the snap button as shown.



Step 3


Continue to connect the frame as illustrated in the image below.

Note: Center Support Bar is for 90" Only.

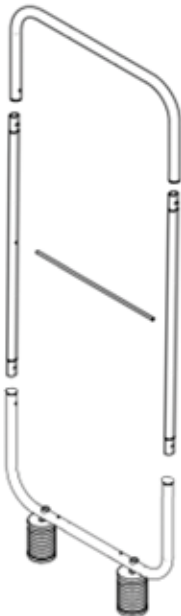

Step 5


Place Springs (9) into slots on ballast (7).

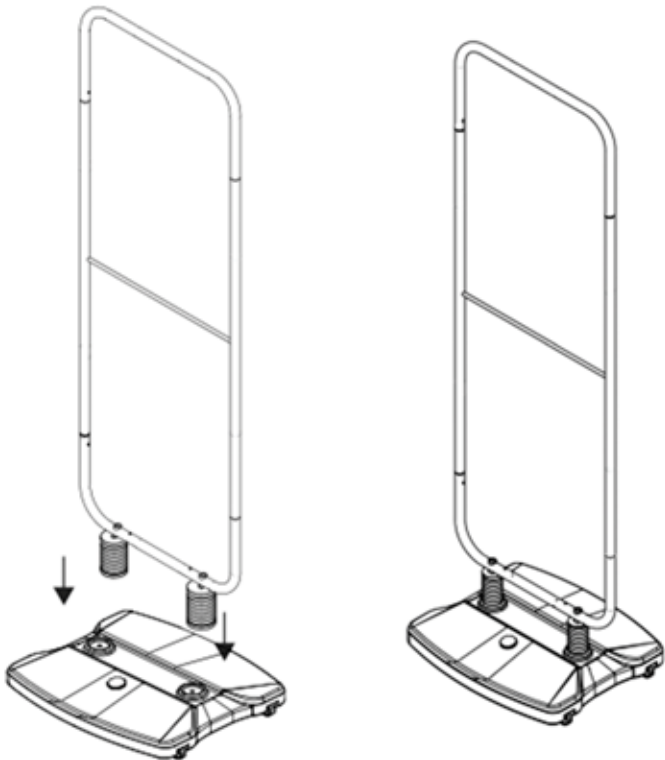

Step 6


From the bottom of the Ballast (7), Place washers and then Thumb Screw (8) through openings and screw into bottom of the Springs.

Do Not Overtighten Bolts.

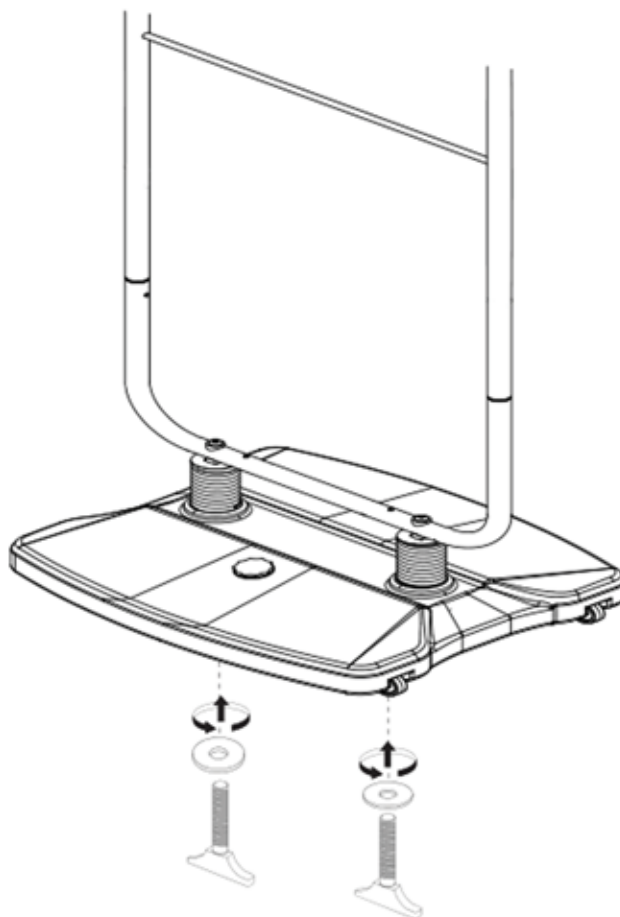

Step 7

To apply graphic (11), pull down over frame and use side zippers on the bottom corners to close.

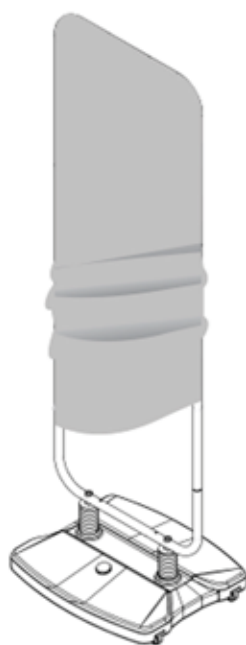

Corner zippers stop at the springs, area between springs remains open.

Storage & Care

Place all product parts into box and store in a cool dry location. Recommended for indoor use only.

Machine wash on gentle cycle using mild detergent. Tumble Dry No Heat. Do NOT dry clean, Do NOT Iron.