
Narrowcade & Minicade

NARROWCADE: KIT: 210260, HARDWARE: 210261 MINICADE: KIT: 210262, HARDWARE: 210263,

GRAPHIC ONLY: 271090

Product Parts

- 1 A-Frame Sign
- 2 Graphic Panels (2 Graphic Panels With Kit Purchase)
- 3 12" Strips Hook (2)
- 4 12" Strips Loop (2) (Hook/Loop not attatched to graphics)

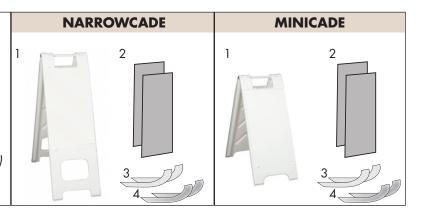



Graphic Install Using Well Nuts (Sold Separately - in pkgs of 20 Item #WN20)

Step 1



Drill 6 - 1/2" holes into the frame in the desired location to attach the graphic. Insert the well nuts into the pre-drilled holes.




Step 2

Screw bolt into well nut until it expands like a molly in drywall. Remove the screw and you now have a permanent screw recepticle enabling easy graphic replacement.

Step 3

Position the sign on the frame to determine where holes need to be on the sign to line up with well nuts. Drill 1/4" holes in Sign for Bolt. Screw sign to frame.




Graphic Install Using 1" Wood Screws (Not Provided)

Step 1



Recommended screw 1/8" diameter and no longer than 1"

Position the sign on the frame and drill pilot holes (slightly sign and frame.



Step 2

Screw the sign to the frame using the pre-drilled pilot holes.





Storage & Care

Store in a cool, dry location. Clean hardware with damp cloth and wipe dry. Clean graphics with dry cloth.