
Rectangular Tubing Sign Display - Single



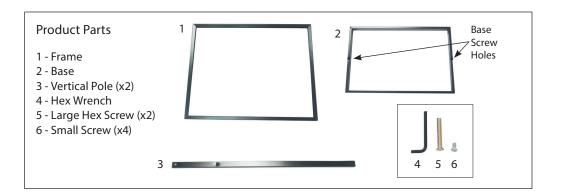

Display Set-Up

Step 1

Begin by removing all parts from the box and place on a clean, flat surface.

Locate the center holes on the short sides of the Base (2). Flip the Base (2) so the holes with the flared edges face downward.



Step 2


Feed the Large Hex Screws (5) from the bottom, upwards, through the holes.



Step 3

Line up one of the Large Hex Screws (5) with a Vertical Pole (3) and use the Hex Wrench (4) to thread and tighten them together. With the Large Hex Screw (5) almost tightened, rotate the Vertical Pole (3) so that the hole 3/4 of the way up, is facing the inside of the display.


Repeat this step for the second Vertical Pole (3).



Step 4

Hold the Frame (1) so that the Graphic Slit (located on one of the short sides) is on the top. Line up the side holes in the Frame (1) with the holes in the Vertical Poles (3).

Thread a Small Screw (6) from the inside of the Frame (1) into



the Vertical Pole (3) and tighten with a Screwdriver (not included).

Repeat for the second Vertical Pole (3).

Step 5

Slide the Graphic into the Graphic Slit on the top of the Frame (1) and gently guide it down until it rests on the bottom.

Your display is now complete and ready to be used.



Storage & Care

Place all product parts into shipping box and store in a cool, dry location.

To clean, wipe with damp cloth.