

Change Agent Telescoping Retractor

Product Parts

- 1 - Base
- 2 - Snap Banner Rail
- 3 - Loop (x2)
- 4 - Shock Corded Telescoping Pole**
- 5 - Pin



***Do Not Pull Pin Until Directed**




Banner Install

Step 1

Begin by removing all of the parts from the carry case and place them on a clean, flat surface.

Remove both End Caps from the Snap Banner Rail (2) and open the clamp.

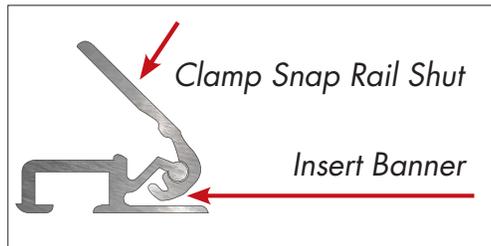

Step 2

Fully insert the top edge of your banner into the groove of the Snap Banner Rail (2) and snap shut and replace end caps.



Step 3

Lay the banner flat, printed side down. Firmly and evenly press the bottom of the banner onto the Hook of the leader on the Base (1).



Step 4

Facing the front of the Base (1), Maintain tension on the banner while slowly removing the Pin (5). Allow the banner to gently roll into the canister.

*Store the Pin (5) on the side of the base or adhere it under the base for future graphic changes.



Display Set-Up

Step 1

Place the Base (1) on the floor and assemble the Shock Cord portion of the Shock Corded Telescoping Pole (4).



Step 2


Insert the bottom of the Shock Corded Telescoping Pole (4) into the hole in the center of the Base (1) until fully seated.



Step 3


Stand facing the back of the Base (1) and gently pull the Snap Banner Rail (2) upwards.

Insert the Top Connector of the Shock Corded Telescoping Pole (4) into the rear groove on the Snap Banner Rail (2) where the "insert" sticker is located.

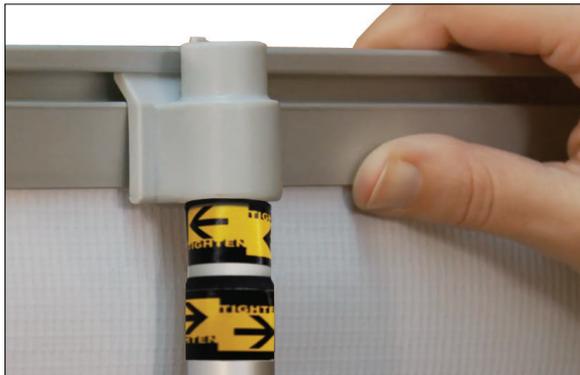

Step 4

Adjust the Shock Corded Telescoping Pole (4) to the desired height and lock into place. Do not exceed 80" high.
*Overtightening or the use of tools when locking in place may cause the pole to fail.

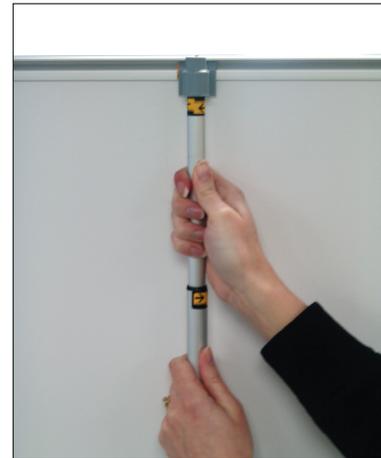

Storage

Place all product parts into Carry Case and store in a cool dry location.

