
ShowGoer Backlit Counter

Product Parts

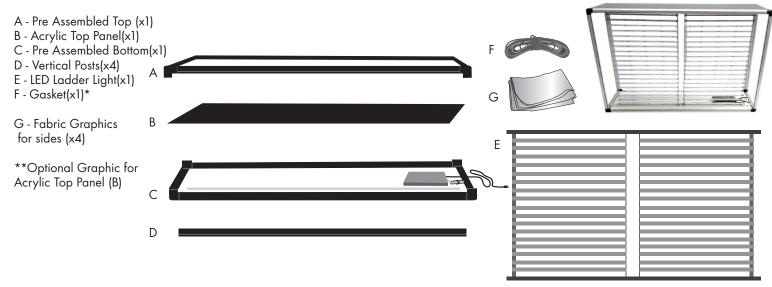

Display Set-Up

Step 1

Place Pre Assembled Bottom (C) on clean flat surface and slide Vertical Post (D) over each corner on bottom.

Step 4

Place the Acrylic Top Panel (B) on the Pre Assembled Top (A).

Step 7

Plug display into power source.

Step 2

Place Pre Assembled Top (A) on to the four Vertical Posts (D).

Step 5

Connect the power cord to the LED Ladder Light control box

**Optional Graphic for Acrylic Top

- 1. Prepare the counter surface with a light cleaning.
- 2. Lay graphic out on a clean surface and locate the middle of the graphic.
- 3. Tape the middle of the graphic to the clean surface.
- 4. Beginning from the middle, apply the graphic to the Acrylic Top (B), first one side then the other.
- 5. Install Acrylic Top (B) into hardware.

Step 3

Locate the Velcro on the LED Ladder Light (E) and attach it to the Velcro strip on the Pre Assembled Bottom (C). Then locate the grooves that the LED Ladder Light (E) will rest on. There are two sets of grooves depending on your lighting preference.

Step 6

For best results attach the Gasketed Graphic (G) to the bottom corner channels first then the top corners. Push (do not slide) the Gasketed Graphic (G) into the channel on the frame.

* Gasket is attached to the Graphic when ordered as a kit.

Storage & Care

Place all product parts into carry case and store in a cool, dry location. To clean, wipe with damp cloth.

