
# **Snap Banner Display**

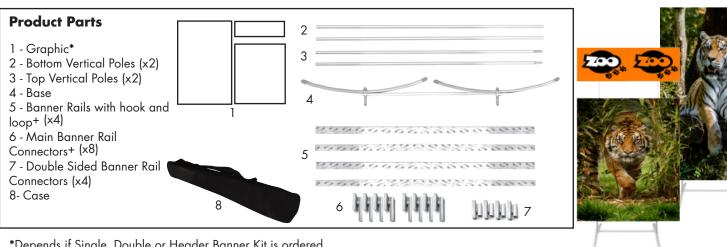



- \*Depends if Single, Double or Header Banner Kit is ordered.
- +Quantity specific to kit ordered.

### **Display Set-Up**

#### Step 1

Start on flat surface and turn out feet on Base (4). Insert Bottom Vertical Poles (2) over post protruding from feet on each side.





#### Step 3

Snap Main Banner Rail Connectors (6) to the Top and Bottom Vertical Poles. Position depends on Graphics\* ordered. It is best to orientate connectors to maximize space as pictured below. Slide along Poles for desired position.







Top Orientation

### Step 2


Push Top Vertical Poles (3) onto post protruding from Bottom Vertical Poles (2).



To display double sided Graphics\* snap the Double Sided Banner Rail Connectors (7) to the back of the Main Banner Rail Connectors (6). Adjust position by sliding up or down.

### Step 5

Remove the loop that is preinstalled on the Banner Rail+. The hook portion remains on the Banner Rail (5). Note: loop is preinstalled on graphic.




# Display Set-Up Continued...

#### Step 6

Turn the Banner Rail Connectors so channel runs left to right. Connect Banner Rails (5) with the loop to Banner Rail Connectors (6) by snapping into place. Slide the Rail as needed to center. Line up Graphic\* to Rail and press.



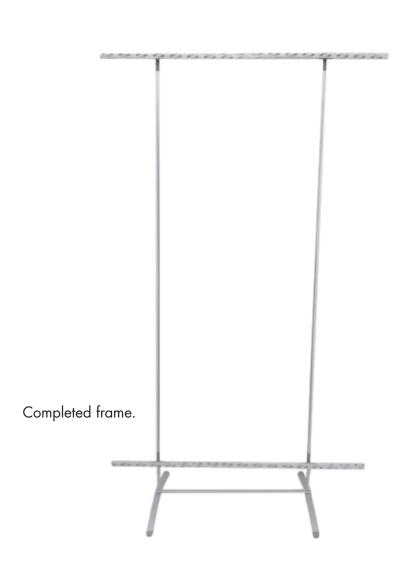

## **Storage and Care**

Place all product parts into carry cases and store in a cool dry location. To clean, wipe with damp cloth.