


InstaChange Retractor

Product Parts

1. Base
2. Graphic Cartridge
3. Shock-corded Telescoping Pole
4. Carry Case

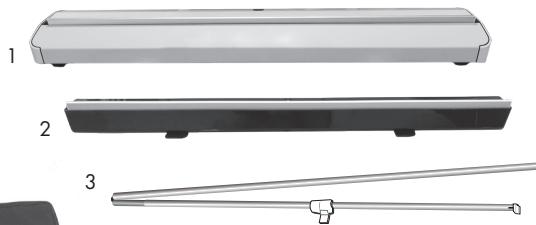

Display Set-Up


Step 1

Assemble the Shock Corded Telescoping Pole (3). Insert the bottom of the Pole into the hole in the center of the Base (1). Ensure pole is seated completely into the bottom of the base.



Step 3

To Adjust the height, open the Flip Lever on the Telescoping Pole (3) and adjust to the desired height. Close the lever to secure your pole height.

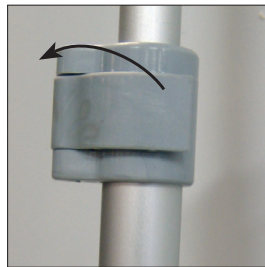


Step 2

Stand facing the back of the Base (1). With a firm grip, gently lift the snap banner rail up to the top of the pole and insert the pole top clip into groove on snap banner rail. Adjust height according to your artwork.



Step 4


If unit is un-level, adjust the four feet up or down by turning them.



Banner Installation

Step 1

It is easiest to stand the Base (1) on its side to insert the Graphic Cartridge (2), this minimizes scratching the base or damaging the graphic. Ensure both locking levers on bottom of Graphic Cartridge are in the 'unlock' position.

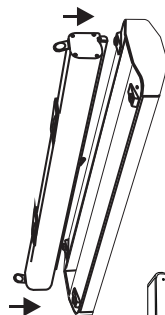


Step 2

Align the snap banner rail attached to the Graphic Cartridge (2) to the opening in the Base (1). Graphic will be facing away from hole on Base (1) that is for the Shock-corded Adjustable Pole(3).

Step 3

Once the Graphic Cartridge (2) is properly seated, turn the locking levers to the 'lock' position.

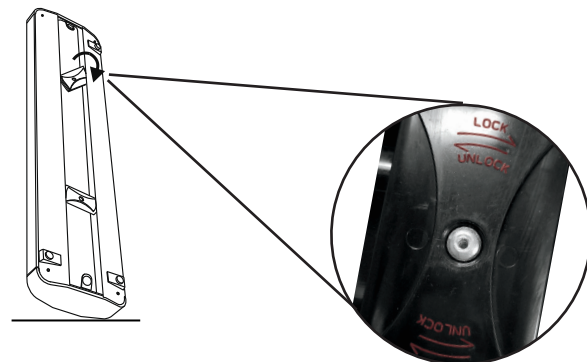

Storage & Care

Place all product parts into Carry Case (supplied) and store in a cool dry location. Clean hardware by wiping with a damp cloth.