

Rolling Cooler Vendor Cart

Product Parts

1. Cooler
2. Crossbar
3. Leg x2
4. Shelf
5. Front Wheel x2
6. Back Wheel x2
7. Handle x2
8. Bottle Opener
9. Cap Catcher
10. Umbrella Bracket
11. Drainage Plug
 - A. Drain Bushing
 - B. Rubber Gasket x2
 - C. Locknut
 - D. Cap & Cap Ring
12. Flat-Head Screws x30
13. Hex Wrench
14. Wrench
15. Screwdriver



Display Set-up

Step 1

Remove 4 screws to detach Crossbar (2). Take all parts out of cooler (1). Remove remaining hardware from packaging and lay on smooth clean surface.

Reattach the crossbar (2).



Step 2

Flip the Cooler (1) upside down and screw the legs (3) onto the cooler (1).



Step 3

Place the Shelf (4) onto the legs making sure the holes for the Umbrella Bracket (10) are on the back, and secure by screwing in both the Front (5) and Back (6) Wheels.



Step 4

Flip the cooler onto the wheels.
Attach Handles (7).



Step 5

Attach the Bottle Opener (8).




Step 6

To attach Cap Catcher (9) turn screws so width is just large enough to accommodate the Cap Catcher (9), Keeping it loose enough to take off and dispose of bottle caps.



Step 7

Attach the three Umbrella Mount Brackets (10) to the back of the cooler.

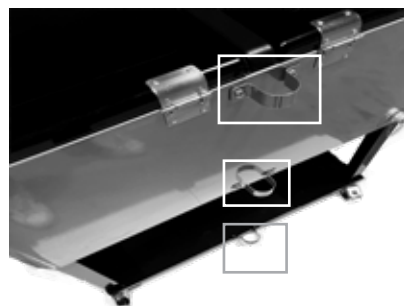

Step 8

Install Drain Plug (11) by first unscrewing the Cap (11D) and taking off one of the Rubber Gaskets(11B). Insert Drain Bushing (11A) from the inside of the Cooler (1). On the outside put on Rubber Gasket(11B) and Cap (11D) Ring. Then Tighten with Locknut (11C). Tighten the Cap onto the Drain Plug (11).

