

Rover Portable Sign Assembly Instructions

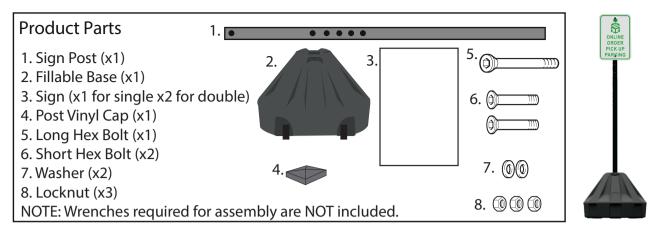

Display Set-Up

Step 1


Insert Sign Post (1) into Fillable Base (2). Insert Long Hex Bolt (5) into hole located on the front of Fillable Base (2), through Sign Post (1) and hole on back of Fillable Base (2). secure with Locknut (8). DO NOT OVER TIGHTEN






Step 2


Attach Sign (3) to Sign Post (1) using Short Hex Bolts (6), Washers (7) and Locknuts (8). DO NOT OVER TIGHTEN. Please see diagram 2 for double-sided option.



Step 3


Add Vinyl Cap (4) to top of Sign Post (1).







Fill the Fillable Base (2) with Silica Sand (not included).



Care

To clean, wipe with damp cloth.