


Side Snap Banner

Product Parts

- 1 - Top Rail Assembly
- 2 - Bottom Rail
- 3 - Top Pole
- 4 - Bottom Pole
- 5 - Base
- 6 - M6 x 1.0 Screw (2)
- 7 - 4mm Hex Wrench
- 8 - 2.5mm Hex Wrench
- 9 - Base Connector

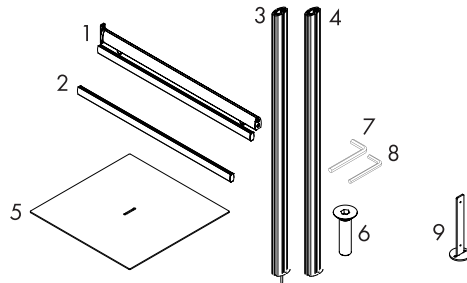


Display Set-Up

Step 1

Insert Base Connector (9) thru slot on bottom of Base (5) into Bottom Pole (4). Screw together with the M6 screws (6) using the 4mm Hex Wrench (7). Note: Bottom end of pole is threaded to accept the screws.


Step 2

Insert connector on Top Pole (3) into slots on Bottom Pole (4) and tighten the set screws on both sides using the 2.5mm Hex Wrench (8).




Step 3

Place graphic into Top Rail Assembly (1) by removing both End Caps and snap it open. Fully insert the top edge of graphic into the groove of the Top Rail Assembly and snap it shut. Repeat by following same steps for inserting graphic into Bottom Rail (2).

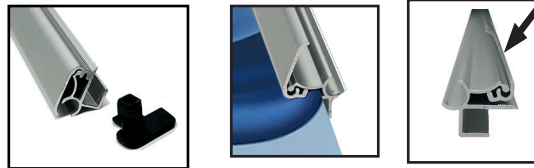

Step 4

With graphic attached to both Top Rail Assembly and Bottom Rail. Remove cap from Top Pole and insert the Top Rail Assembly into the slot. Place at desired height and tighten set screws using the 2.5mm Hex Wrench (8). Replace cap. Note: Bottom Rail does not attach to Bottom Pole, it will remain loose.

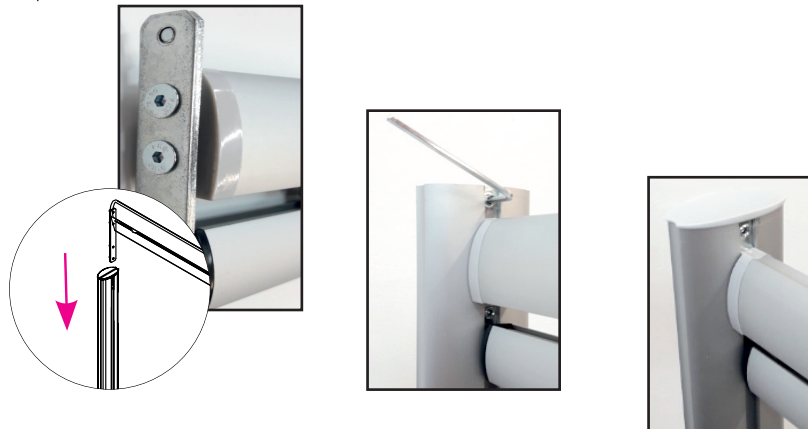

Storage and Care

Store in a cool dry location. To clean hardware, wipe with a damp cloth.