


Value SEG Wall Mount Display

Product Parts

- 1 - Long Sections (x2)
(x4) (30x60 & 48x60 only)
- 2 - Short Sections (x2)
- 3 - Corner Mounting Bracket (x4)
- 4 - M6 x 1.0 Screws (x16)
(attached to Corner Mounting Bracket)
- 5 - Wall Anchor
- 6 - Wall Anchor Screws (x2)
- 7 - #3 Metric Hex Wrench (30x60 & 48x60 only)
- 8 - #4 Metric Hex Wrench
- 9 - Graphic

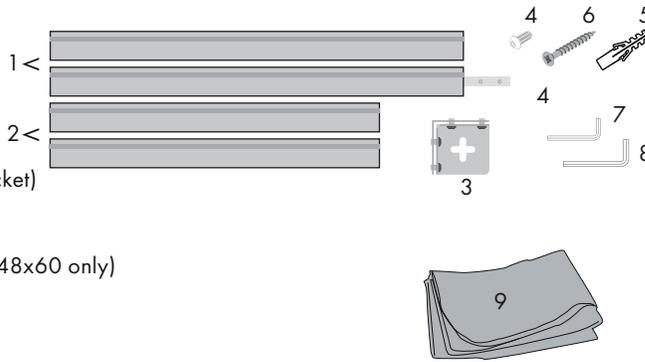


Display Set-Up

Step 1

Connect one Long Section (1) to one Short Section (2) by inserting a Corner Mounting Bracket (3) into each end. Loosen M6 Screws (4) if needed.

Step 2

While holding the two Sections firmly together, tighten M6 Screws (4) with #4 Metric Hex Wrench (8) in place at outer edge first. Complete by tightening the two M6 Screws (4) on inner edge. Repeat for remaining corners.

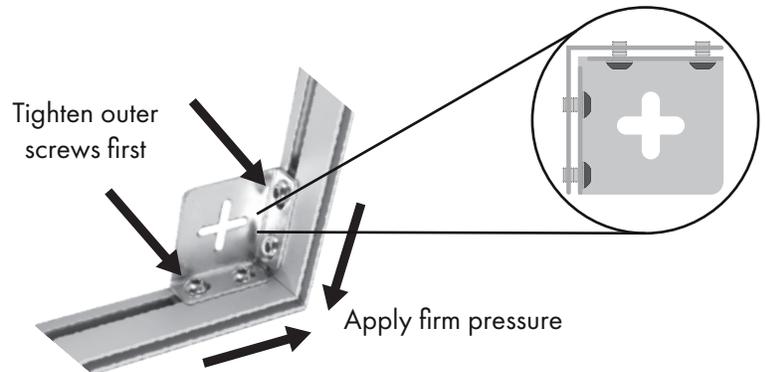


Display Set-Up for 30"x 60" & 48"x 60"

Step 1

Follow Steps 1 & 2 above.

Step 2

Connect two Long Sections (1) together by sliding one section that has the bracket with set screws. Hold the two Sections firmly together and tighten set screws using #3 Metric Hex Wrench (7). Repeat for other side.

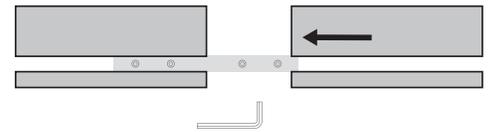


Graphic Install

Step 1

Insert the graphic's gasket edges into the frame, by inserting each corner into the frames four corners, then work around the frame alternating opposite sides until complete. Loop for removing Graphics (9) will be at bottom corner.

Insert stitched side of the gasket first



To remove the graphic, pull the loop found on the corner.



Storage & Care

Store in a cool, dry place. To clean hardware, wipe with a damp cloth. Do NOT dry clean graphics, can Steam Clean wrinkles.