Replacement instructions of wireless charging pad on ShowGlower Power Station



ShowGlower Power Station





Removing Existing Wireless Pad From Power Station

Step 1

Please ensure display is disconnected from external power source.

Step 2

Use a small flat edge screwdriver to gently pry existing Wireless Charging Pad from counter surface.

Step 3

Unplug the existing USB-Micro cord from the Wireless Charging Pad.

Step 4

Dispose of the Wireless Charging Pad according to local regulations.

Note: Existing cord that is plugged into Wireless Charging Pad can't be removed, and will not fit into new Wireless Charging Pad.

Install New ©Certified Wireless Pad

Step 1

Affix black adhesive backed circle into opening.

Step 2

Affix hook or loop to backside of new Wireless Charging Pad.

Step 3

Affix hook or loop on top of black cirle.





Step 4

Using either Option A or B plug in cord to the new © Certified charging pad, and press into place on the black circle.

Option A: Utilize one of the other threee USB-Micro cords and plug into new Wireless Charging Pad.

Option B: Use USB-Micro/USB that is supplied with new Wireless Charging Pad and plug USB end into one of three ports in center.

Questions? Please call 1 - 888 - 376 - 7469 or see the instruction video at Showdowndisplays.com and clicking on the Safety/Compliance tab.

Replacement instructions of wireless charging pad on ShowGlower Power Tower



Removing Existing Wireless Charging Pad From Power Tower

Step 1

Please ensure display is disconnected from external power source.

Step 2

Use a small flat edge screwdriver to gently pry existing Wireless Charging Pad from counter surface.

Step 3

Unplug the existing USB-Micro/USB (smooth cord) from the Wireless Charging Pad. Remove the graphic if one is installed. Unplug USB-Micro/USB cord from the power supply, and remove the cord.

Step 4

Dispose of the Wireless Charging Pad and cord according to local regulations.

Install New USB-Micro/USB Cord

Step 1

Disassemble the top portion of display, please refer to original assembly intructions that came with your display.

Step 2

Remove the 4 screws from bottom of Counter Surface using 4mm Hex Wrench supplied with original hardware.

Step 3

With the help of another person holding the existing braided cords up out of the way, remove the counter surface.

Step 4

Take new replacement cord and push USB end down through main channel of the product. Use the 4mm Hex Wrench to help guide the new cord and pull enough through so that the new cord can be plugged into the power supply.



Questions? Please call 1 - 888 - 376 - 7469 or see the instruction video at Showdowndisplays.com and clicking on the Safety/Compliance tab.

Replacement instructions of wireless charging pad on ShowGlower Power Tower continued......



Install New USB-Micro/USB Cord Continued.....

Step 5

Again with the help of another person, hold all of the cords up out of the way so that the counter surface can be reinstalled. Secure counter surface by reinstalling the 4 screws.

Step 6

Refer to original assembly instructions for final reassmebly.

Install New **©**Certified Wireless Pad

Step 1


Affix black adhesive backed circle into opening.

Step 2

Affix hook or loop to backside of new wireless charging pad.

Step 3

Affix hook or loop on top of black cirle.

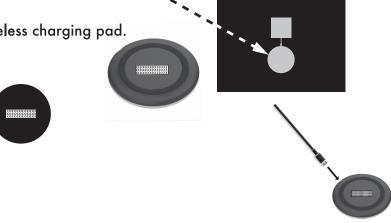

Step 4

Plug new USB to USB-Type C cord (braided) into new 4 Certified charging pad, and press into place on the black circle.

Questions? Please call 1 - 888 - 376 - 7469 or see the instruction video at Showdowndisplays.com and clicking on the Safety/Compliance tab.