


# TRIGA Go Monitor Mount

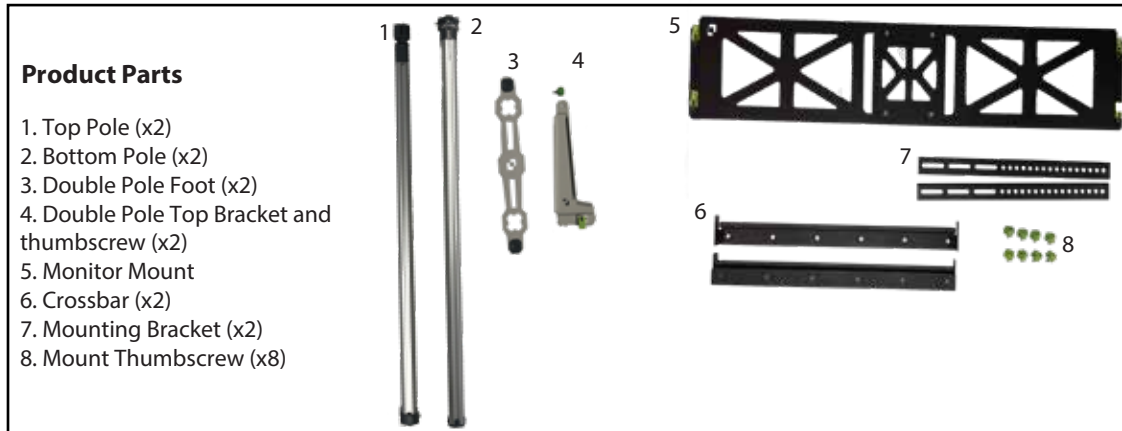


## Display Set-up

### Step 1

Attach the Top Pole (1) to the Bottom Pole (2) by turning connector locks.

Repeat for second Pole.

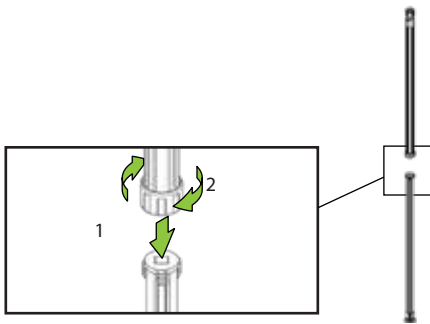

### Step 2

Replace the feet on the chosen poles from your current TRIGA Go wall or U-booth with the Double Pole Foot (3).

Insert Bottom Pole (2) into the remaining space on the Double Pole Foot. Twist pole to secure.



### Step 3

Attach the Double Pole Top Brackets (4) to the Top Crossbar on your wall or U-Booth using the turn and push knob.



Then align opening on the small end to the top of the Top Pole (1) and secure using the green Thumbscrew provided with Double Pole Top Bracket.



### Step 4

Attach the Crossbars (6) to the Monitor Mount (5) using two Thumbscrews (8) for the bottom and two for the top.



### Step 5

At your preferred height, install the Monitor Mount (5) onto the Poles using the turn and push knobs, making sure that height is the same on each pole.



### Step 6

Align the Mounting Brackets (7) to your monitor and attach using the four remaining Mount Thumbscrews (8).




### Step 7

Slide the Mounting Brackets (7) onto the Crossbars (6).



How to use turn and push knobs

1. Insert the ridge into the track on the hardware with the knob parallel to the track
2. Turn knob so it is perpendicular to Track in the Hardware
3. Push up to secure

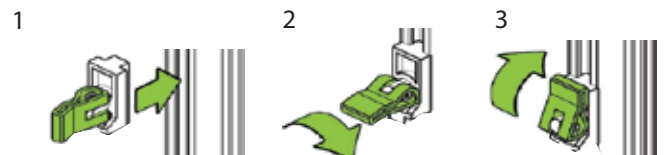

## Storage & Care

To clean non-graphic hardware, wipe with a damp cloth.